


ARTO/D QUICK STEAM GENERATOR

Steam output : 100 ÷ 6000 Kg/h

For continuous operation or
intermittent rapid steam demand

Three pass once-through steam generator

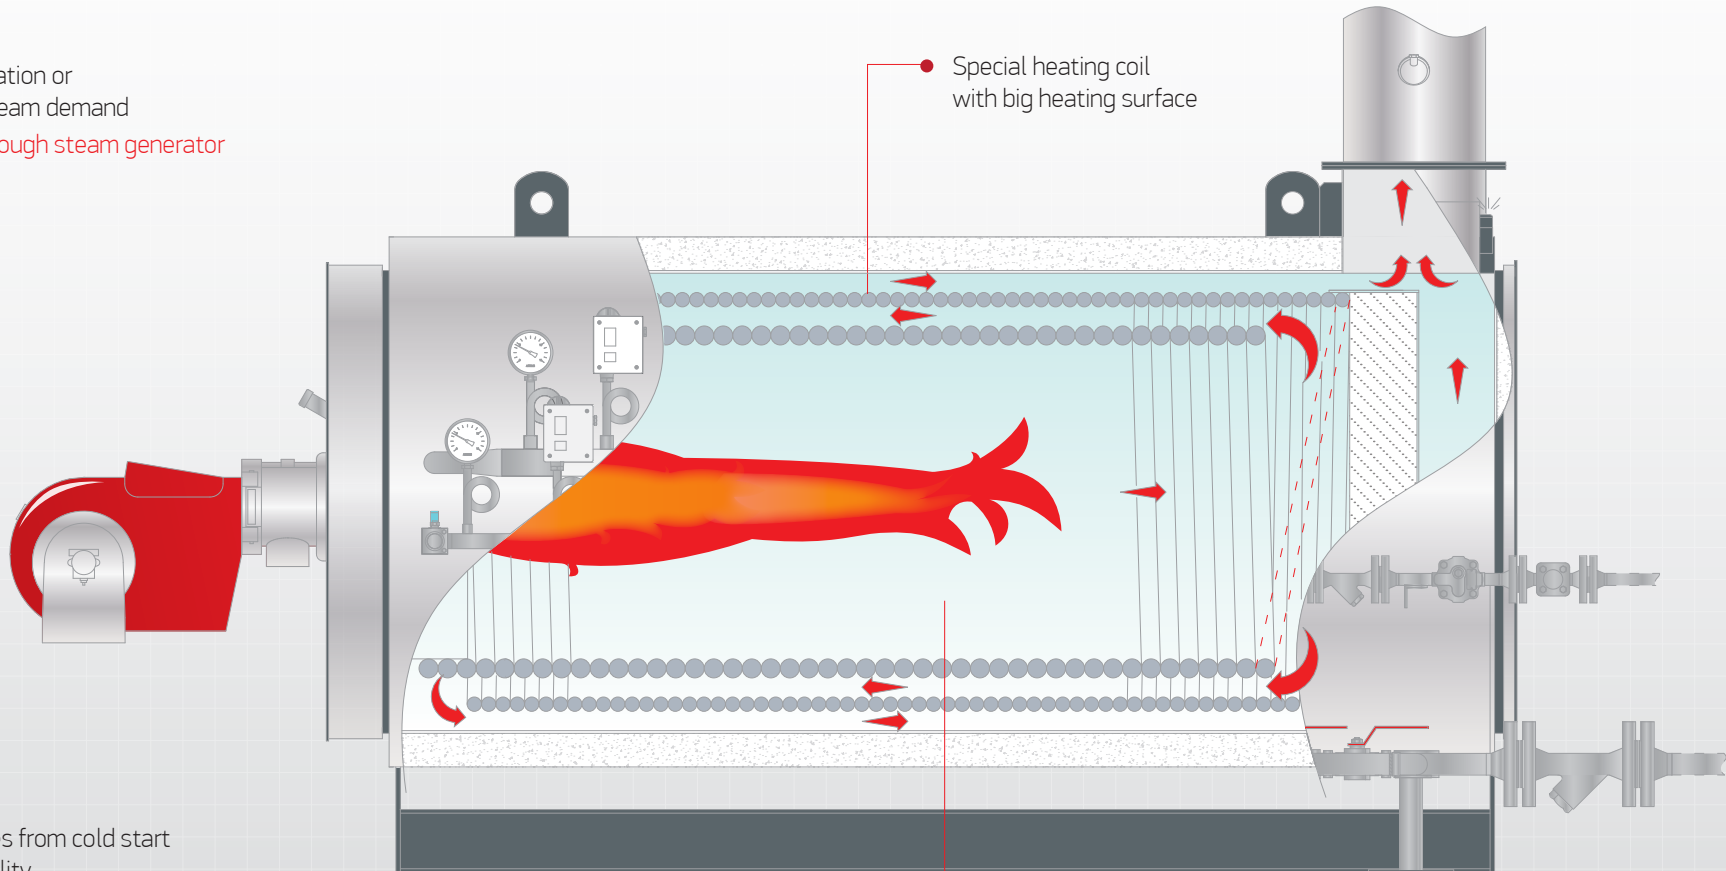


- Only a few minutes from cold start to service availability
- Excellent fuel efficiency (>91%)
- Pollutant reduced combustion
- Low noise operation

• Furnace for low - NOX combustion

Equipment for Steam Generator ARTO/D


- Devices against water shortage and overheating
- Devices for the feed water quantity control

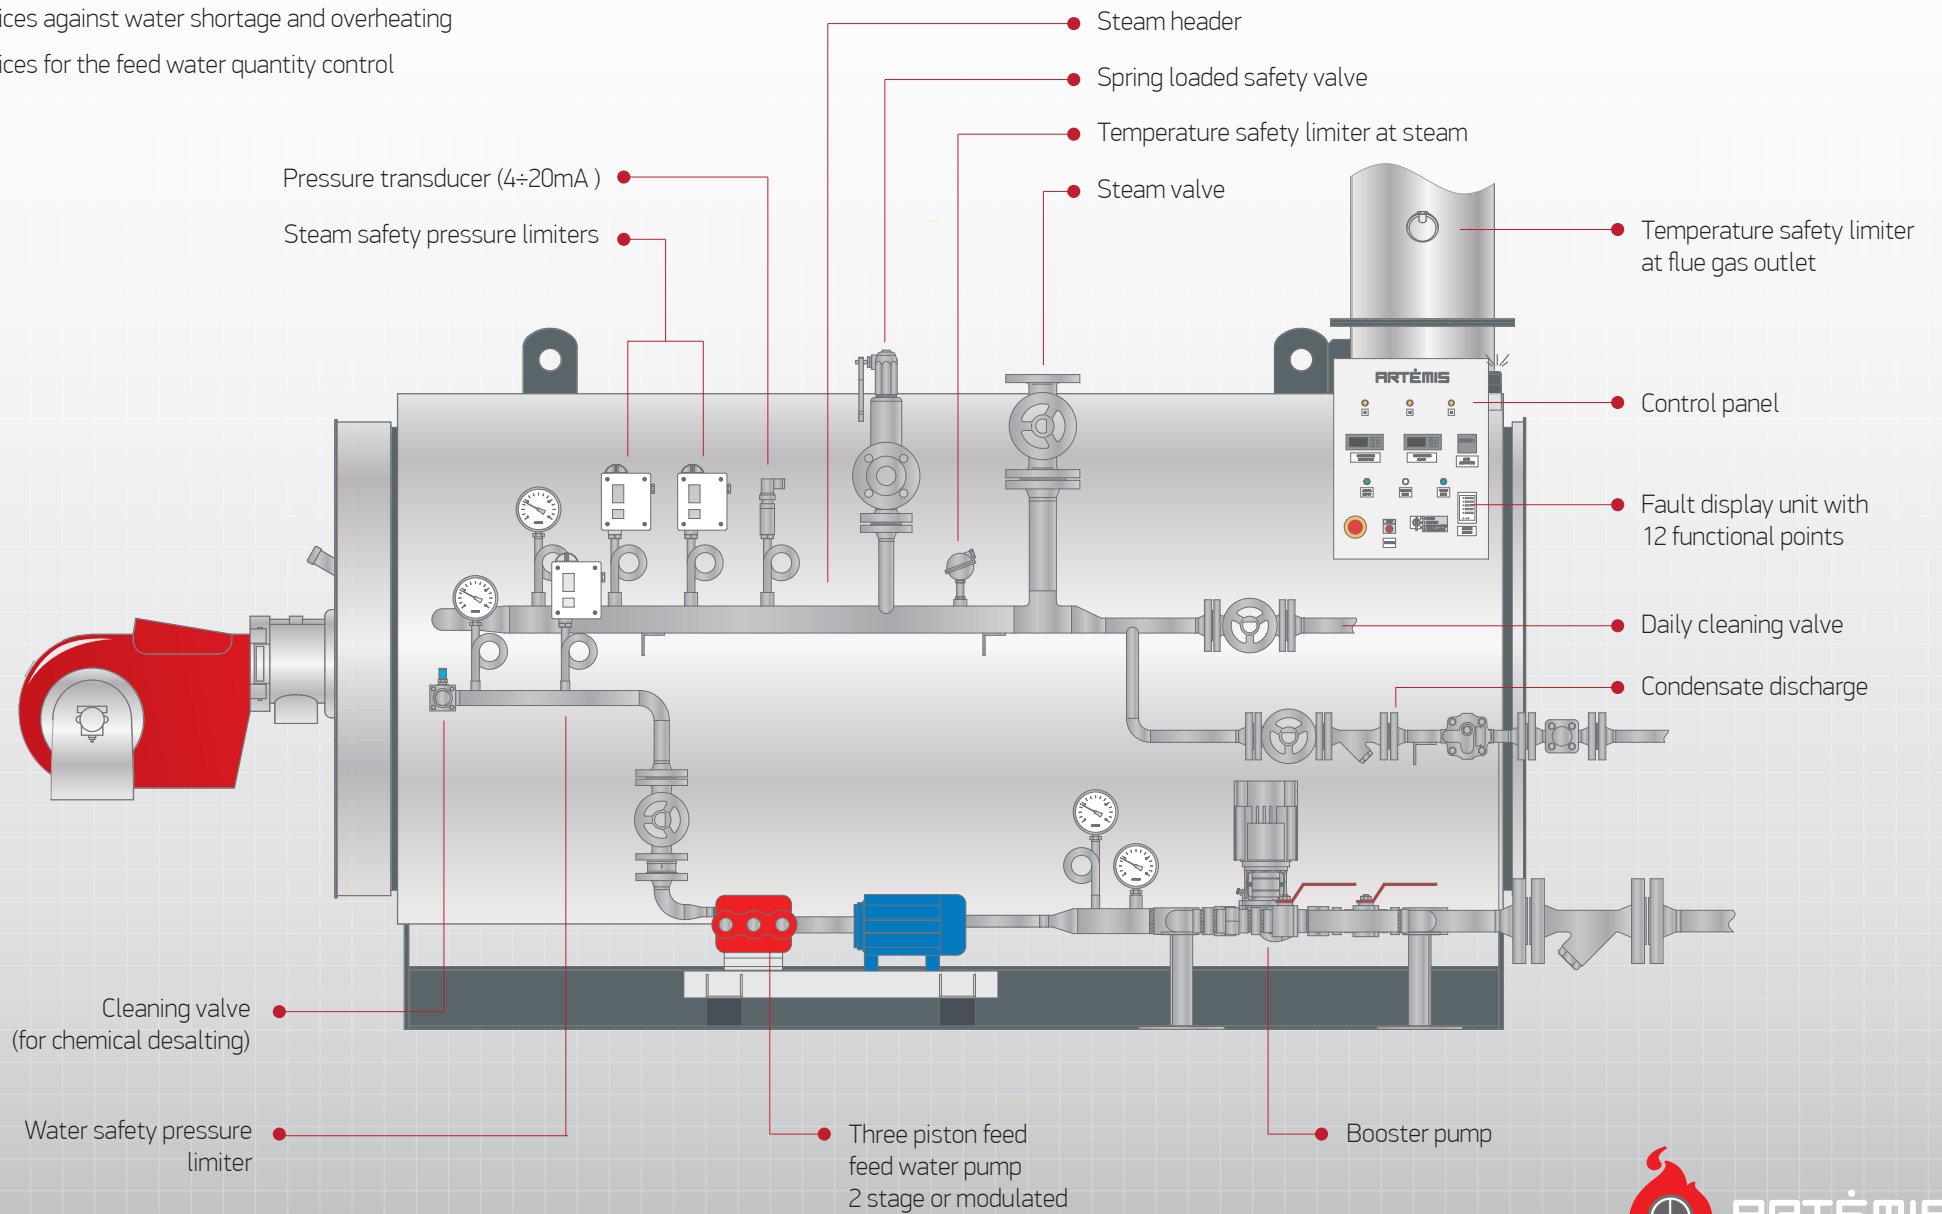

SPECIAL EQUIPMENT ECONOMIZER


Flue gases contain a considerable heat potential at a high temperature level. The ARTEMIS Economizer utilises this heat potential for feedwater preheating and enhances boiler efficiency by 4÷6 %

- Flanged to flue gas connection
- With helically finned tubes
- Large inspection ports
- No separate foundation

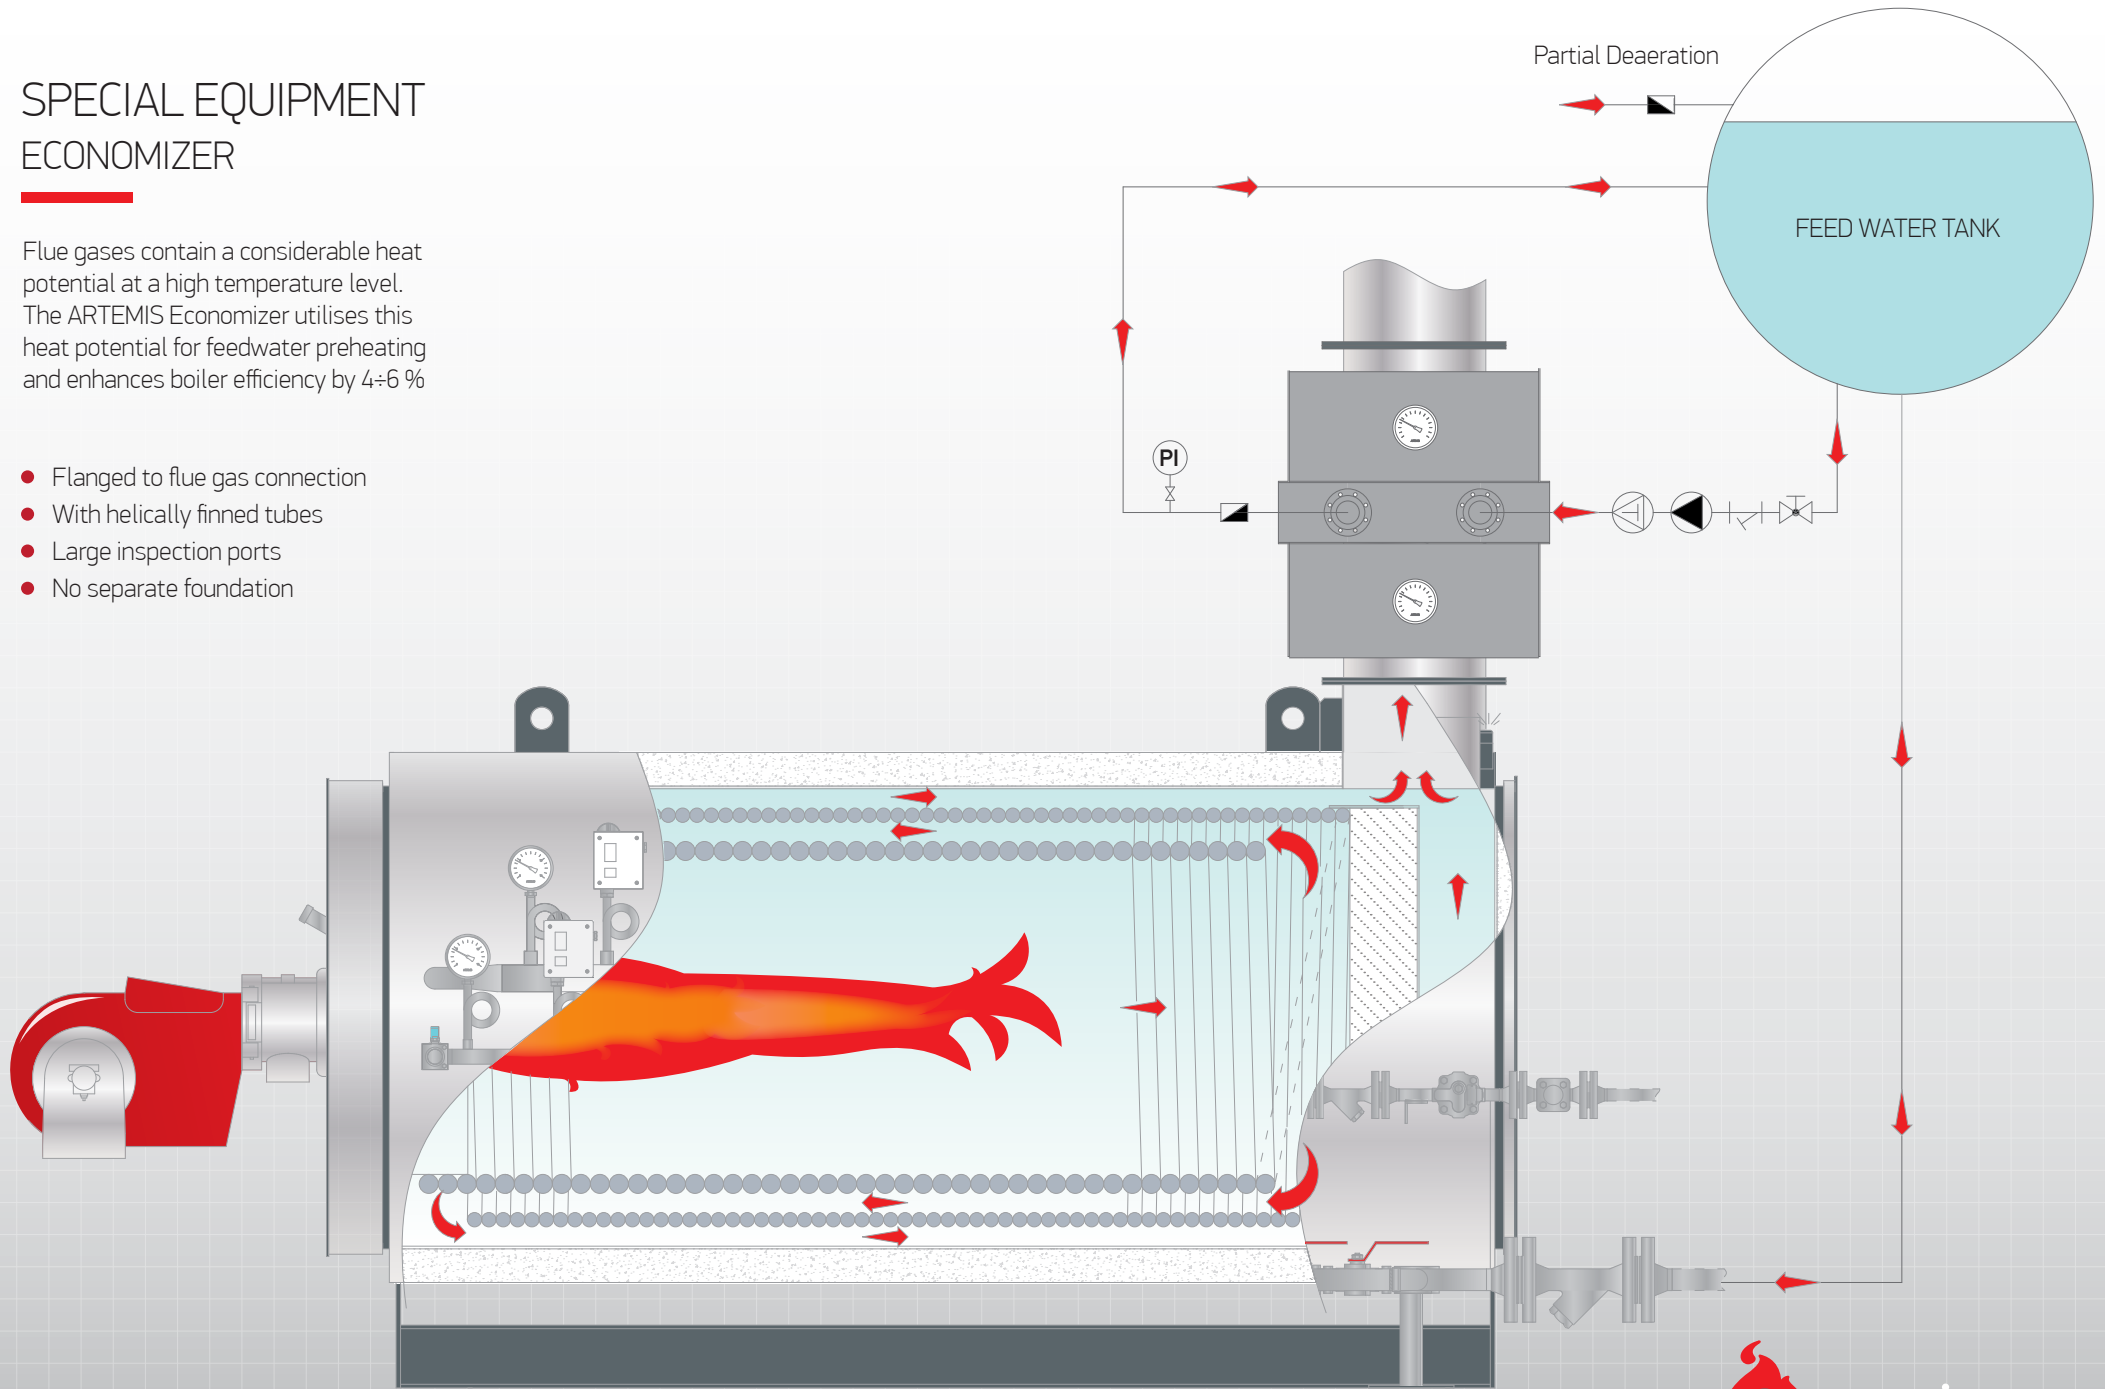

ARTO/D QUICK STEAM GENERATOR

Various perspectives

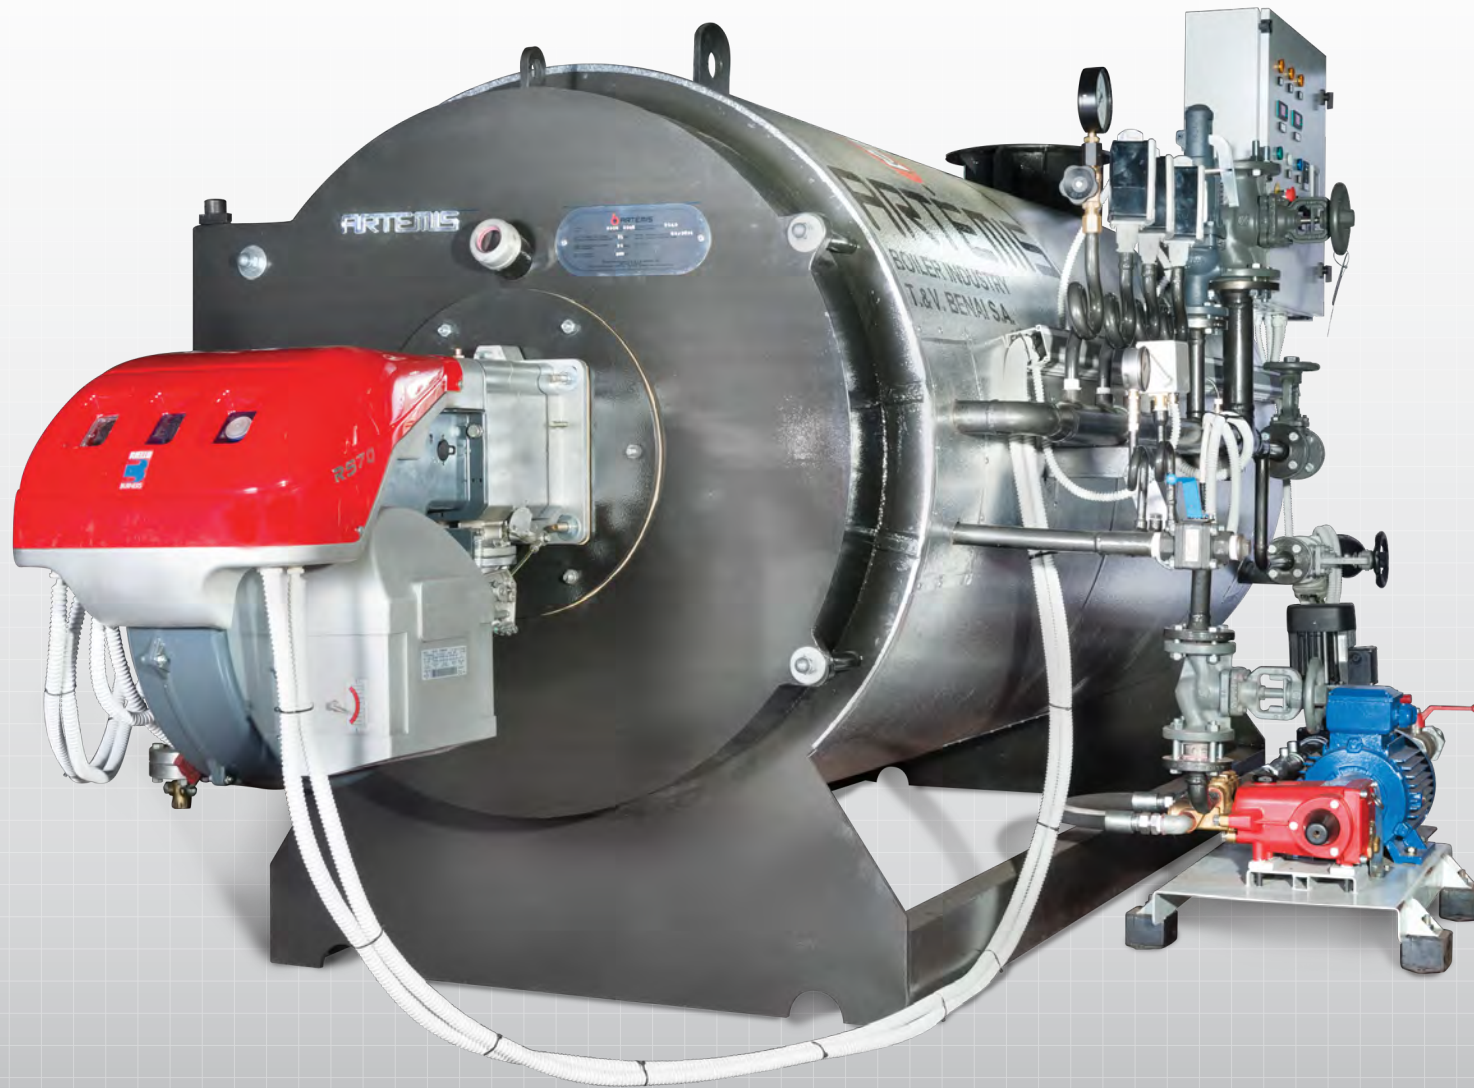

ARTO/D QUICK STEAM GENERATOR

Various perspectives

